

This product is part of the RIS-FLANGE Tanklid fittings range, designed to make Forecourts easier and quicker to install, as well as improving standards, decreasing the probability of leaks, and making testing and maintenance easy and safe.

Suitable for:

Pressure Fill

Effective at low flow rates

Flow operating range: 10 - 1500 Litres/ minute


Normal operating pressure: +4 Bar

(Tested to 8 Bar)

IMPORTANT NOTE:

The RIS-STOP family of valves are not suitable alternatives for true "Shut off valves" and must not be used in continuously pressurised systems.

For more information on available configurations please ask to see our Part Number Matrix.

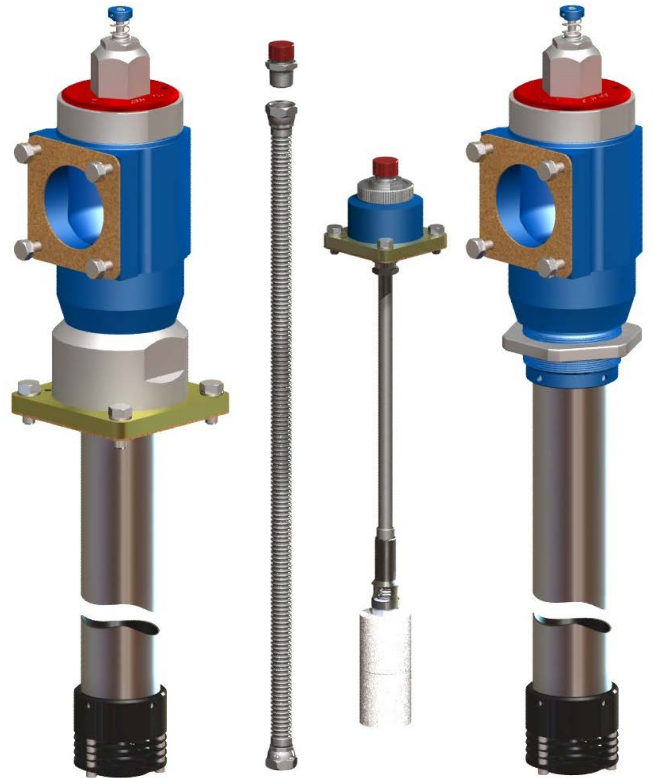

Braided flexible connectors available:
PCAT to PCAT and PCAT to ANSI.

The only fail-safe, normally closed and testable mechanical valve available. This valve is part of our RIS-STOP range of above and below ground tank overfill prevention valves.

- Lower installation costs, can be assembled into tanks at factory
- Reduce vapour growth with optional Diffuser and Air Transfer Valve
- Normally closed valve, suitable for pressure fill installations
- The ONLY fail-safe mechanical valve available - the ONLY testable valve available
- High flow rates up to 1500 litres per minute
- The ONLY valve operating effectively at low flow rates (10 litres / minute)
- Operating pressure range: 0.15 - 5 Bar, Flow operating range 10 - 1500 litres / minute)
- Operating temperature range: -25° C to +60° C
- SIRA certification: ATEX / SIRA 07ATEX9165 TYPE A2. EN13616:2004. EN13463-1:2001.
- Manufactured in compliance with European Directive 2014/34/EU

Materials:

Anodised Aluminium
Viton A (FKM)
Delrin (polyacetal)
Stainless Steel
HDPE Closed cell foam

Suitable for:

Petroleum Spirit (including Ethanol Blends up to 90%)
Diesel
Bio Diesel / FAME Blends
AvGas and Jetfuel

Document Ref:

DATA-RIS-STOP-3P-170823
Maintenance Instructions
MAINT-RIS-STOP-3P
Installation Instructions
INS-FLOAT-KIT
and INS-RIS-STOP-3P